

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/70978 A1

(51) International Patent Classification⁷: A42B 3/22, A61F 9/04

(21) International Application Number: PCT/SE00/00892

(22) International Filing Date: 5 May 2000 (05.05.2000)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data: 9901732-9 11 May 1999 (11.05.1999) SE

(71) Applicant (for all designated States except US): PELTOR AB [SE/SE]; P.O. Box 2341, S-331 02 Värnamo (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): FOLKESSON, Jan [SE/SE]; N. Övergången 10, S-331 35 Värnamo (SE).

(74) Agents: WALLENGREN, Yngvar et al.; Patentbyrå Y Wallengren AB, P.O. Box 116, S-331 21 Värnamo (SE).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DE (utility model), DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SAFETY VISOR

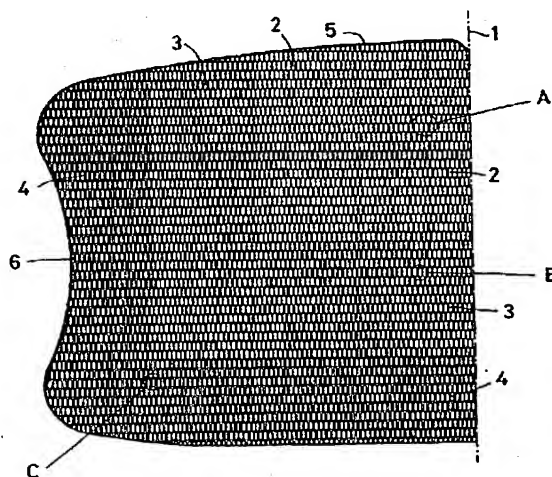

(57) Abstract: A safety visor is produced by etching of metal and comprises a grid which defines a large number of light-permeating holes (7, 8, 9). The safety visor has at least two zones (2, 3, 4) where the holes (7, 8, 9) are of different areas and/or configuration. An upper central zone (2) has greater light transmission than the remaining zones (2, 4) of the safety visor. The C-C spacing for the holes (7, 8, 9) is constant in both the vertical and lateral directions regardless of in which region of the safety visor the holes (7, 8, 9) are located. In one preferred embodiment, the holes (7, 8, 9) are hexagonal with two approximately parallel sides which are longer than the remaining sides and are directed in the vertical direction of the safety visor.

WO 00/70978 A1